

TIMAN 3330

Made for great results. Designed for the enjoyment of work.

in in

- Greater operator comfort
- Lowest noise level in its class
- Technology patented in the EU
- Quick change of attachment
- Wide range of applications
- Safe and user-friendly

TIMAN

ADDALASE

- Runs on petrol
 - EU Stage V
 - Danish design and quality

MADE IN DENMARK

timan.dk/en

Good work requires proper working conditions. That is why, since 2004, the design and development of our machines have focused primarily on the comfort of the driver at work.

Every Timan machine has Danish quality and craftmanship – from design through production to service. All this is a guarantee of greater efficiency and operational safety, so you can do your job well regardless of the activity or season.

We believe that the interaction between job satisfaction and efficiency paves the way to the best result. That is why we say:

Timan Comfortably





855

TIMAN

TIMAN BASS

Exceptionally low fuel consumption

Timan is at the top when it comes to fuel consumption compared to its competitors*. Get more mileage out of your machine, protect the environment, and save money. *See reverse for fuel consumption

Environmentally friendly machine

Timan 3330 complies with all EU Stage V emission standards. This significantly reduces NOx emissions. The electronically controlled engine ensures optimum fuel utilization.

TIMAN 3330

Easy change of attachments

Connect the machine arms to the attachment, lock with Easy Shift and connect the pressureless hydraulic hoses to the machine. You are now ready to work.

TIMAN 3330

Get ready for a better working experience. Timan 3330 machines are designed from the start as the most reliable and comfortable tool carrier on the market. It is suitable for maintenance of parks and gardens, and dealing with winter maintenance from ice to snow.

Thanks to the wide selection of attachments and patented technology in the EU Timan 3330 is the best machine for best results - all year round.

Built-in camera (optional) No more getting out of the cab to check that everything is OK. The suction box camera can be combined with the rearview camera with automatic switching to ensure optimum overview.










USER COMES FIRST.

Good work needs good working conditions. Therefore, the construction of the Timan 3330 cabin offers the user maximum comfort and the best conditions on the market together with USB and Bluetooth, as well as cup and phone holders. This machine now works for you.

Low noise level and plenty of space



Forget hearing protection and enjoy your music. Gone are the days of stressful and uncomfortable work with just 68 dB at 2,600 rpm in the spacious, air-conditioned cabin.

Fully adjustable driver's seat



Forget about hip and back pain. Height adjustment, lumbar support and ergonomic design guarantees maximum comfort. Suspension chassis



With shock-absorbing suspension on all four wheels, Timan 3330 offers you the smoothest and most enjoyable driving experience on the market - even on rough terrain. Full control at hand



The Timan 3330 control panel has been developed together with those who operate the machine on a daily basis. Cruise control, electronic hand throttle and Stop & Go are standard features of the machine.

HORNADOTZI

Timan presents a unique EU-patented sweeping system; Tornado T2. You get the most efficient and environmentally friendly system in its class, mimicking the suction power of a tornado and combining this with the mighty forces of water. The result is exceptionally high suction power, making our sweeper more efficient than ever before.

Unique sweep system

EUnited



When wind and water are implemented in our EU-patented technology, it gives an extraordinary suction power. The water helps move the material, while flushing the suction hose.


Recirculation of water



No need to worry about refilling water all the time. With our system, we recycle the water from the suction tank. From the cabin, you can refill water from an external tank while driving. Low operating costs



The T2 nozzle is the most durable on the market. That's why it comes with a 30-month warranty against wear. The hopper contains no rotating parts or filter brushes. This means less maintenance.

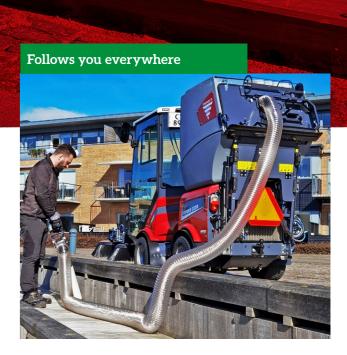

7-meter flexible hand suction hose allows you to work everywhere. The hand suction is equipped with dust suppression with water recirculation.



Convenient attachmenttool change

Just stay in the cabin while you switch from the disc spreader to the drop spreader. Simply press the button on the control panel and the plates automatically raise and stop.

COMBI SPREADER CS 200

TIMAN

GS 200

Your winter service has never been so convenient. You simply control everything from inside the cabin with the unique Combi-Spreader CS 200 by Timan. We've combined the disc spreader with the drop spreader and have produced a tool that allows you to easily adapt the spread pattern to the surroundings - with great benefits for the environment. Welcome to a better working experience.

TIMAN

IVAN SKR



Full control over the spread rate

Regulate the amount and width of spread from 1 metre to 6 metres. This makes your winter service much easier when switching between pavements, streets and parking lots. This protects the environment and reduces costs.



Use your preferred material With the CS 200 Combi-Spreader which holds up to 150 litres, you can spread salt, gravel, sand and grit. The hydraulic tipper enables you to increase the capacity to approx. 250 litres. The maximum load capacity is 225 kg.



Stop & Go function

At standstill, for example at a traffic light, the spreader stops automatically and starts again when you set the machine in motion - standard, of course, to the Timan 3330.

ONE MACHINE. EVERYTHING YOU NEED. NO MATTER WHAT THE SEASON.



Rotary mower GMR Powerful grass cutter for efficient work. Cutting height and tilt-up controlled hydraulically. Cutting width of 1530 mm.



Rotary mower 1350 Grass cutter with heart-shaped blade cover allows you to cut right up to lampposts etc. Cutting width of 1350 mm.



Weed brush with suction device Put an end to pesticides and

other environmentally harmful substances. Remove and collect weeds in just one operation, so you don't have to double the work.



Hydraulic bucket No more awkward postures and heavy lifting. Use the bucket to spread gravel, sand and wood chips.



Multi-trimming hedge trimmer

Offers a precise and uniform result, and cuts and shreds the material in one go. Change sides of the trimmer hydraulically. Cutting width 1300 mm.



Hedge trimmer The hedge trimmer offers a precise and uniform result for hedges, bushes and plants close to the ground. Cuts both horizontally and vertically.



Sweeping roller The hydraulic settings of the sweeping roller with built-in

floating position and parallel displacement makes it suitable for sweeping all year round. 1,200 mm width, Ø 550 mm.



High-pressure washer Rediger High-pressure washer. With the 10-metre-long hosepipe and 120-litre tank capacity, the pressure washer can be used continuously for 20 minutes. Automatic hose reel



CS-200

to 6 meters.

Tipping trough The tipping trough can be

emptied hydraulically into the spreader while driving. This provides double the capacity. Advantageous in combination with the Combi Spreader CS-200.



Available as drop spreader or as Combi Spreder. Spreading width adjustable from 1 meter



V-plow

The 3 hydraulic settings enable you to clear large amounts of snow and ensures free and safe passage.



Dozer blade

The tool has a working width of 1350 mm and offers great capacity for great amounts of snow. Supplied as standard with a safety tilt and rubber edge.

Technical data Timan 3330

Tillall 5550		
Vehicle-ready we	ight	1185 Kg
Max. admissible	weight	1850 Kg
Admissible trailer	weight without overrui	n brake 600 Kg
Admissible trailer	weight with overrun	brake 1500 Kg
Dimensions of th	e basic machine	T - A
(LxBxH)		1130 x 1990 mm
Engine Kubota	a petrol engine, 3 cyl	inders, 33 HP EU
standard		Stage V
Petrol tank		
Speed		27 km/t
Turning radius		
Steering		Knækstyring
Cooling system	water-cooled 45° ou	tside temperature

Noise level in the cabin at 2,600 revolutions 68 dB machine, EN 15429-2 Noise level in the cabin, EU1322 / 2014 method B ..79 dB - 5.3 litres per hour when working with 4 brushes Noise level in the cabin, EU985/2018 driving 71 dB - 5.1 litres per hour when working with 2 brushes Passing, EU985/2018 standing......74 dB - 4.1 litres per hour when working with 2 brushes (ECO)

Option

Air-conditioning system Trailer coupling combination, ball and jaw coupling Camera at the suction mouthpiece Rear view camera LED warning lights Sliding window Air-sprung driver's seat Reverse headlamp

Technical specifications Tornado T2 sweep-suction machine

Gross capacity suction tank	550
Net capacity suction tank (EN15-	429-1)467 l
Water tank capacity	120
Emptying height	1.350 mm
Sweeping width 2 brushes	
Sweeping width 3 brushes	<u>1.800 m</u> m
Sweeping width 4 brushes	2.300 mm
Diameter of centrally placed sucti	on devices 152 mm
Length of hand-held vacuum clea	aner
Length high-pressure washer	10 m
- LANGER CARGE	

Fuel consumption with sweep-suction

Subject to printing and photographic errors



Di Di Di



Call us for a non-binding demonstration.



Timan A/S · Fabriksvej 13 · 6980 Tim · 97 330 360 · info@timan.dk · timan.dk/en

MADE IN DENMARK